


# Hydraulic Separator-set 120/80, small Hydraulic Separator up to 8,0 m<sup>3</sup>/h, 4 bar, 110 °C

Article number: 4205684

**reflex**

Thinking solutions.

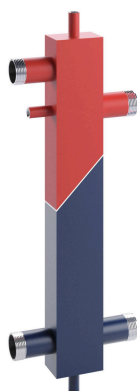

## Features

Type	120/80
Material	S 235 JR
Separator content	6,4 L/lfdm
Number of generator circuits	1 pcs.
Number of consumer circuits	1 pcs.
Operating temperature	-10 °C - 110 °C
Operating pressure	0 bar - 4 bar
Connection, consumer circuit	R 2"
Connection, generator circuit	R 2"
Max. volume flow	8,0 m <sup>3</sup> /h
Output at ΔT 20 °K	186,00 kW
Chamber size	120/80
Height	800 mm
Weight	11,12 kg

## Description

Hydraulic Separator in vertical design. Ensures optimum hydraulic decoupling of the various primary and secondary circuits under all operating conditions. No interacting pumps at partial and full load. With four side outlet nozzles for connection of the heat consumers and heat generators. 1/2" sleeves for venting, draining and sensors.

The component is checked for 100% leak-tightness and primed in the factory.

Packed as a SET including EPP heat insulation. The heat insulation complies with the German Building Energy Act (GEG).