
# AG connection set AG 1 1/4", with secured shut-off and drainage, 100 °C, 10 bar

Article number: 9119205

Thinking solutions.

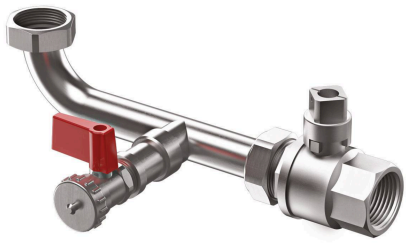

## Features

| | |
|---|---|
| Type | AG 1 1/4" |
| Operating temperature | 100 °C |
| Operating pressure | 10 bar |
| Connection | R 1 1/4" |
| Outer pipe diameter | 32 mm |
| Weight | 1.00 kg |

## Description

Connection group AG
For simple, professional assembly and maintenance of diaphragm-type pressure expansion vessels in heating, cooling water and water supply systems for non-drinking water.

Consisting of a pipe connector with a flat gasket on the vessel connection screw fitting, a G 1/2" fill/drain ball valve and a cap ball valve with a secure shut-off in accordance with DIN EN 12828. Particularly suitable for upright MAG units with a flat gasket-sealing threaded nipple connection, e.g. Reflex N, G, S or Refix DE, DC.