
AG connection set AG 1", with secured shut-off and drainage, 100 °C, 10 bar

Article number: 9119204

Thinking solutions.

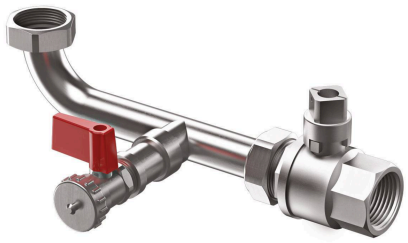

Features

Type	AG 1"
Operating temperature	100 °C
Operating pressure	10 bar
Connection	R 1"
Outer pipe diameter	25 mm
Weight	0.85 kg

Description

Connection group AG
For simple, professional assembly and maintenance of diaphragm-type pressure expansion vessels in heating, cooling water and water supply systems for non-drinking water.

Consisting of a pipe connector with a flat gasket on the vessel connection screw fitting, a G 1/2" fill/drain ball valve and a cap ball valve with a secure shut-off in accordance with DIN EN 12828. Particularly suitable for upright MAG units with a flat gasket-sealing threaded nipple connection, e.g. Reflex N, G, S or Refix DE, DC.