


# fin-tube heat exchanger RWT 2 for Storatherm > 750 liter



Thinking solutions.

Article number: 5418900

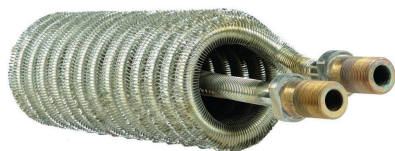

## Features

|                       |                     |
|-----------------------|---------------------|
| Type                  | RWT 2               |
| Operating temperature | 90                  |
| Operating pressure    | 10 bar              |
| Connection            | G 3/4"              |
| Continuous output     | 75 kW               |
| Heating surface top   | 2,30 m <sup>2</sup> |
| Diameter              | 170 mm              |
| Width                 | 225 mm              |
| Installation length   | 540 mm              |
| Weight                | 8,10 kg             |

## Description

RWT ribbed-pipe heat exchanger

Auxiliary heat exchanger for installation in Storatherm Aqua AF/1 hot water storage tanks and AF/2 solar cylinders of greater than 750 litres.

Installation takes place on site in the available service opening and enables the incorporation of a further heat source, e.g. a solar thermal system, thermal/district heat.

Pipe material: Copper ribbed pipe