


Enquiry form for manifolds

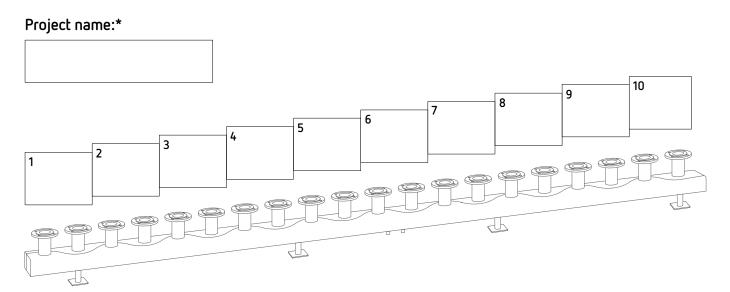

Manifolds:		Accessories:	Options:
Number*		Stand brackets ☐ 270-340 mm	☐ Including SINUS EasyFixx (from sizes 180/110)
Manifold size*		□ 405-600 mm	☐ Thermally separated
Manifold length*	mm	Wall brackets	□ FTF-1 (F1 long)
Nozzle spacing*	mm	Insulation	= AriWedi, AriEuroWedi, Boa H/W, etc.
Flanges PN 6/16*		Name plates	□ FTF-14 (F4 long) = AriEuroWedi, BoaCompact, etc.
Thread/Bushings		Drainage channel	•
Make/model Fittings			☐ FTF-20 flaps, made by:
J			☐ KSB Super Compact
Power data:		Remarks:	☐ Gate valves
Design pressure*	bar		☐ Ball valves
Design temperature*	°C		☐ PUR foam, coarse-grained aluminium
Temperature difference	K		☐ PUR foam, galvanised
Volume flow rate*	m³/h		☐ Mineral wool, galvanised (100 mm)
			☐ Corrosion protection AGI Q-151

Start your configuration with ProSinusX prosinusx.sinusverteiler.com