


Exferro D/TW 80-100 (88.9-114.3), permanent magnet as accessory for Exdirt/Extwin, 110 °C, 10 bar

Article number: 9258350

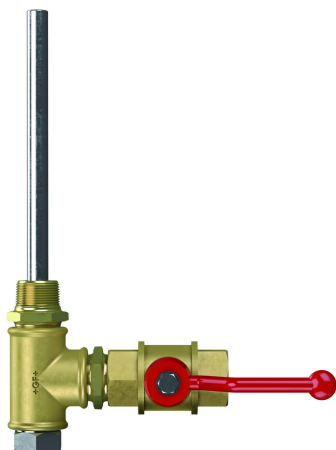

Features

Type	D/TW 80-100 (88.9-114.3)
Operating temperature	110 °C
Operating pressure	10 bar
Connection	G1"
Diameter	25 mm
Installation length	365 mm
Weight	1,40 kg

Description

Exferro

High-strength permanent magnet for optional installation or retrofitting in Exdirt/Extwin dirt and sludge separators.

Magnet comprises an isostatically pressed neodymium-iron-boron rod inserted in a screw-in immersion sleeve. Separation and fixing of ferromagnetic particles from the separation process.

Particles can be permanently and systematically removed from the fluid flow by screwing the magnet sleeve out of the separator housing and then cleaning it.