


Storatherm Heat Mini H 200, Buffer cylinder for heating systems, silver, 3 bar

Article number: 7352570



Thinking solutions.

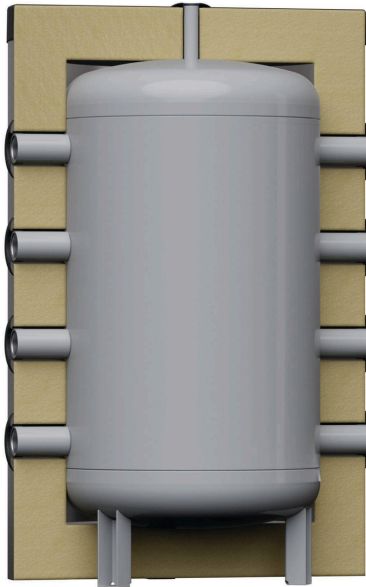

Features

Type	H 200
Colour	silver
Insulation type	foil jacket
Insulation strength	100 mm
Energy efficiency class	B
Nominal capacity	199 l
Number of sleeves	8 St.
Operating temperature	15 – 95 °C
Max. perm. operating pressure	3 bar
Operating pressure	3 bar
Connection sleeve/flange	G 1 1/2"
EEHR sleeve connection	G 1 1/2"
Heat maintaining losses	59 W
Diameter	680 mm
Diameter without insulation	480 mm
Height	1370 mm
Height without insul.	1358 mm
Tilt dimension approx.	1395 mm
Weight	25.50 kg

Description

Storatherm Heat Mini H 200

Buffer tank for storing heating water. As an upright version without a flange, without internal heat exchangers. The two series, or four, of connection nozzles of threaded 1 1/2 inch design for heat generators and heat consumers are vertical, offset by 180°, and arranged as charging or discharging nozzles. The nozzles can be used for screwing in sensor sleeves, thermometers or similar.

Sleeve in upper storage container area, threaded 1/2 inch.

Storage container of steel S235JR, inside uncoated and outside painted. Buffer tank, insulated with removable insulation, according to DIN 4102-1 material class B2.

Energy efficiency class B according to DIN EN 12897:2020-05. The heat losses are measured on a certified test bed.